arXiv:1407.1519v1 [physics.flu-dyn] 6 Jul 2014

The dynamics of inextensible capsules in shear flow under the effect of the nature state

Xiting Niu, Lingling Shi, Tsorng-Whay Pan*, Roland Glowinski
Department of Mathematics, University of Houston, Houston, TX 77204, USA

Abstract

The effect of the nature state on the motion of an inextensible capsule in simple shear flow has been studied in this paper. Besides the viscosity ratio of the internal fluid and external fluid of the capsule, the nature state effect also plays a role for having the transition between two well known motions, tumbling and tank-treading (TT) with the long axis oscillating about a fixed inclination angle (a swinging mode), when varying the shear rate. The intermittent region between tumbling and TT with a swinging mode of the capsule with a biconcave rest shape has been obtained in a narrow range of the capillary number. In such region, the dynamics of the capsule is a mixture of tumbling and TT with a swinging mode; when having the tumbling motion, the membrane tank-tread backward and forward within a small range. As the capillary number is very close to and below the threshold for the pure TT with a swinging mode, the capsule tumbles once after several TT periods in each cycle. The number of TT periods in one cycle decreases with respect to the decreasing of the capillary number, until the capsule has one tumble and one TT period alternatively and such alternating motion exists over a range of the capillary number; and then the capsule performs more tumbling between two consecutive TT periods when reducing the capillary number further, and finally shows pure tumbling. The critical value of the swelling ratio for having the intermittent region has been estimated.

Keywords natural state, tumbling, tank–treading with a swinging mode, intermittent region, capsule, shear flow.

1 Introduction

The dynamical behavior of deformable entities such as lipid vesicles, capsules, and red blood cells (RBCs) in flows has received increasing attention experimentally, theoretically, and numerically in recent years. Lipid vesicles ([1]–[9]), non-spherical capsules ([10]–[14]), and red blood cells ([15]–[23]) show phenomenologically similar behavior in shear flows, which are (i) an unsteady tumbling motion, (ii) a tank–treading rotation with a stationary shape and a fixed inclination angle with respect to the flow direction, and (iii) while tank-treading (TT), the long axis oscillates about a fixed inclination angle which is called swinging mode in [9] (but it is still called the tank–treading in [11]). The aforementioned motions depend on the shear rate, viscosity ratio between internal fluid and external fluid, membrane viscosity and other parameters. Noguchi and Gompper [7, 8, 9] have studied the dynamics of vesicles in simple shear flow using mesoscale simulations of dynamically triangulated surfaces. Vesicles are found to transit from steady tank–treading to unsteady tumbling, or TT with a swinging mode with increasing membrane viscosity. In [9], they have developed a model based on the classical model of Keller and Skalak [10] (KS model) for the membrane to theoretically explain the vesicle motion. Using such model, they obtained the swinging mode and studied the dependency of transition between tumbling and TT with a swinging mode on the shear rate, the viscosity ratio of the membrane and the internal fluid, and the reduced volume [9]. Abkarian *et al.* [18] observed the intermediate motions at the transition from swinging to tumbling (resp., tumbling to swinging) by reducing (resp., increasing) the flow shear

*Corresponding author: pan@math.uh.edu

rate. A simplified model with a fixed elliptical shape for cell membrane has been studied to support their observations. In [11], Skotheim and Secomb introduced an elastic energy term based on the phase angle of the tank–treading rotation to the KS model. They observed tumbling, tank–treading (with a swinging mode), and the intermittent behavior at the transition between tumbling and tank–treading and analyzed the influence of the viscosity ratio, membrane elasticity, shape, and the shear rate on the motion of a capsule of either prolate or oblate shape. The both models considered in [11, 18] take into account the membrane elastic energy. Tsubota *et al.* [21] used a spring model fully coupled with fluid flow to study cell motion dependency on the natural state of membrane through the bending energy term in two–dimensional shear flow. When being at uniform natural state (i.e., all reference angles are set to be the same), the cell appears to tank–tread with an inclination angle unchanged and independent of the preset value of reference angles. But when a biconcave resting shape is assumed as the natural state (called non–uniform state), the cell is observed to perform tumbling and tank–treading with a swinging mode. Tsubota *et al.* [21] believed that the intermittency between tumbling and TT with a swinging mode would occur in very narrow range of parameter space; but they did not obtain such intermittent region because, as discussed later in this paper, the swelling ratios of their cells are not small enough. The elastic energy term introduced by Skotheim and Secomb in [11] has a similar characteristics like the bending energy defined with a non–uniform state used by Tsubota *et al.* in [21] since both have their preferred rest states, which are preferred phase angles at zero and 180 degrees and a biconcave resting shape for Skotheim and Secomb's model and Tsubota *et al.*'s model, respectively. In [13], Vlahovska *et al.* used perturbation approach to study the motion of an almost spherical capsule in shear flow at the Stokes regime. Their reduced models are more general and have no restriction of the fixed shape on the capsule when comparing with the one used in [11]. Without the elastic energy introduced by Skotheim and Secomb in [11], Vlahovska *et al.* obtained the intermittent behavior when having deformation only in the shear plane and that the intermittent behavior disappears in Stokes flow for an almost spherical capsule which can deform in the vorticity direction. They concluded that the intermittency is an artifact of the shape preservation. But they did not analyzed the cases of capsules of more interesting shapes such as a biconcave shape. In [22], the transition between tumbling and tank–treading motions has been considered while studying the model of the RBC membrane fully coupled with the Stokes flow. Tsubota *et al.* obtained no intermittent dynamics around the transition between tumbling and tank–treading motions for the cases of the viscosity ratio, λ, of internal and external fluids between 0.1 and 0.3, which is quite low when comparing with the values used in [11, 13]. In [20], Fedosov *et al.* used a two–dimensional spring network with the natural state in their bending energy term to model red blood cell membrane. They obtained the intermittent region of mixed dynamics in shear flow for the cases of the viscosity ratio λ greater than or equal to 1.

In this paper, we have analyzed the capsule motion in simple shear flow via direct numerical simulations under the effect of the natural state. In [11], Skotheim and Secomb restricted the capsules to stay in the shear plane with the fixed shape and obtained the intermittent behavior by studying the in–plane inclination angle and phase angle with the membrane elastic energy, which is actually a two–dimensional model. Their membrane elastic energy term, which is based on the phase angle, has preferred phase angles at zero and 180 degrees; i.e., the point at the rim likes to go back to the rim. Our bending elastic energy term based on the natural state also has such preference. In simulations, we have relaxed the restriction of the non–deformability (i.e., the fixed shape) and have considered a fully interaction of the fluid and capsule in two dimensional shear flow. Furthermore, we have studied the dependency of the capsule motion on the capillary number $C_a = \mu\dot{\gamma}R_0^3/B$, where μ, $\dot{\gamma}$, R_0, and B stand for the fluid viscosity, the shear rate of fluid flow based on the gradient of the velocity at the wall, the effective radius of the capsule and the bending modulus, respectively. We have obtained that the swelling ratio of the capsule does have its effect on the intermittent region. The intermittent region of mixed dynamics between tumbling and TT with a swinging mode of the capsule with a biconcave rest shape has been

obtained in a narrow range of the capillary number. For the capsule of swelling ratio greater than 0.6, it is almost impossible to capture the intermittent region computationally since the size of the capillary number range for such region is about zero if it exists. Our results are consistent with the results obtained by Tsubota *et al.* in [21] since the cells used in their simulations have the swelling ratio of 0.7.

The contents of this paper are as follows: We discuss the models and numerical methods briefly in Section 2. In Section 3, we show validations and also carry out the go–and–stop experiments on the model to illustrate the effect the natural state on the preferred rest shape. The dynamics of an inextensible capsule under the effect of the natural state in shear flow are studied at different values of the capillary number and confinement ratio in Section 4. In Section 5, the details on the dynamics in the intermittent region are studied. The conclusions are summarized in Section 6.

2 Models and numerical methods

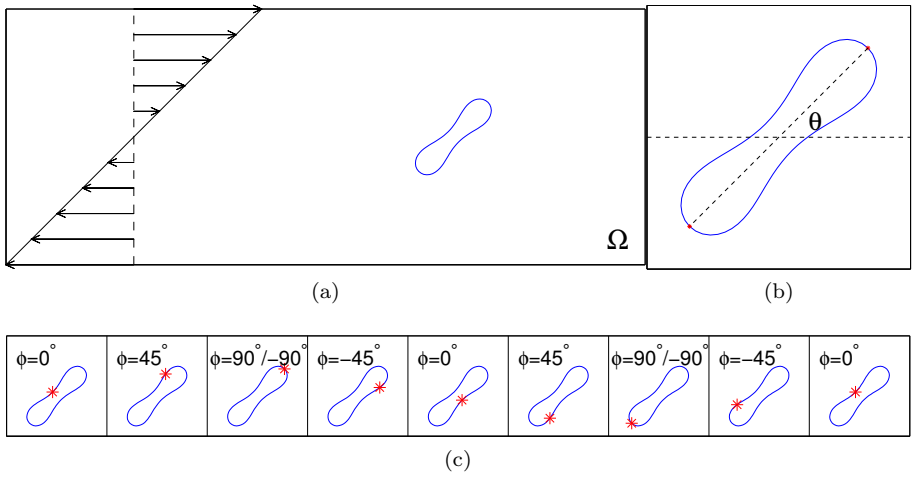

Figure 1: (Color online) Schematic diagram of (a) an inextensible biconcave capsule in shear flow with the computational domain Ω, (b) the inclination angle θ, and (c) the phase angle ϕ.

A capsule with non-spherical rest shape is suspended in a domain Ω filled with a fluid which is incompressible and Newtonian as in Figure 1. The inclination angle θ and phase angle ϕ are defined as in Figure 1b and 1c. respectively. For some $T > 0$, the governing equations for the fluid–capsule system are the Navier–Stokes equations

$$\rho_f \left(\frac{\partial \mathbf{u}}{\partial t} + \mathbf{u} \cdot \nabla \mathbf{u} \right) = -\nabla p + \mu \triangle \mathbf{u} + \mathbf{f}_B, \text{ in } \Omega \times (0, T), \tag{1}$$

$$\nabla \cdot \mathbf{u} = 0, \text{ in } \Omega \times (0, T). \tag{2}$$

with the following boundary and initial conditions:

$$\mathbf{u} = \mathbf{u}_{max} \text{ on the top and } -\mathbf{u}_{max} \text{ on the bottom of } \Omega \text{ and } \mathbf{u} \text{ is periodic in the } x \text{ direction}, \tag{3}$$

$$\mathbf{u}(\mathbf{x}, 0) = \mathbf{u}_0(\mathbf{x}), \text{ in } \Omega \tag{4}$$

where $\mathbf{u}$ and p are the fluid velocity and pressure, respectively, ρ_f is the fluid density, and μ is the fluid viscosity, which is assumed to be constant for the entire fluid. In (1), $\mathbf{f}_B$ accounts for the force acting on the fluid/capsule interface. The boundary condition in (3) is $\mathbf{u}_{max} = (U, 0)^t$ for simple shear flow. In (4), $\mathbf{u}_0(\mathbf{x})$ is the initial fluid velocity.

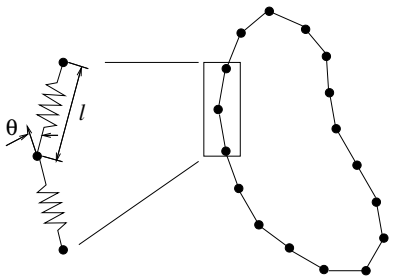

Figure 2: The elastic spring model of the capsule membrane.

2.1 Elastic spring models

An elastic spring model similar to the one used in [21] is considered in this paper to describe the deformable behavior and elasticity of capsules. Based on this model, the capsule membrane can be viewed as membrane particles connecting with the neighboring membrane particles by springs, as shown in Figure 2. Energy stores in the spring due to the change of the length l of the spring with respect to its reference length l_0 and the change in angle θ between two neighboring springs. The total energy per unit thickness of the capsule membrane, $E = E_l + E_b$, is the sum of the one for stretch and compression and the one for the bending which, in particular, are

$$E_l = \frac{k_l}{2}\sum_{i=1}^{N}(\frac{l_i - l_0}{l_0})^2, \quad E_b = \frac{k_b}{2}\sum_{i=1}^{N}\tan^2(\frac{\theta_i - \theta_i^0}{2}). \tag{5}$$

In equation (5), N is the total number of the spring elements, and k_l and k_b are spring constants for changes in length and bending angle, respectively. The set of reference angles $\{\theta_i^0\}_{i=1}^N$ corresponds to a preset natural state, where $\theta_i^0 = constant$ for all i corresponds to a uniform natural state, and otherwise a nonuniform natural state.

To obtain a specified initial shape, which also serve as the reference shape at rest for the natural state, we have used the E_l and E_b given in equation (5) with $\theta_i^0 = 0$ for i =1, ..., N. The capsule is assumed to be a circle of radius $R_0 = 2.8$ μm initially and then it is discretized into $N = 76$ membrane particles so that 76 springs of the same length are formed by connecting the neighboring particles. The shape change is stimulated by reducing the total area of the circle through a penalty function

$$\Gamma_s = \frac{k_s}{2}(\frac{s - s_e}{s_e})^2 \tag{6}$$

where s and s_e are the time dependent area of the capsule and the targeted area of the capsule, respectively, and the total energy per unit thickness is modified as $E + \Gamma_s$. Based on the principle of virtual work the force per unit thickness acting on the ith membrane particle now is

$$\mathbf{F}_i = -\frac{\partial(E + \Gamma_s)}{\partial \mathbf{r}_i} \tag{7}$$

where $\mathbf{r}_i$ is the position of the ith membrane particle. When the area is reduced, each membrane particle moves on the basis of the following equation of motion:

$$m\frac{d^2\mathbf{r}_i}{dt} + \gamma\frac{d\mathbf{r}_i}{dt} = \mathbf{F}_i. \tag{8}$$

Here m and γ represent the membrane particle mass and the membrane viscosity of the capsule. The position $\mathbf{r}_i$ of the ith membrane particle is solved by discretizing equation (8) via a second order finite difference method. The total energy stored in the membrane decreases as the time elapses. The final

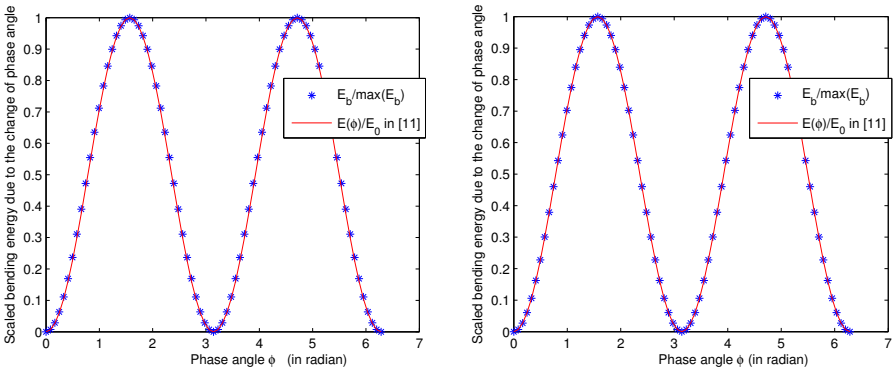
Scaled bending energy due to the change of phase angle
Phase angle ϕ (in radian)
E_b/max(E_b)
E(ϕ)/E_0 in [11]
Scaled bending energy due to the change of phase angle
Phase angle ϕ (in radian)
E_b/max(E_b)
E(ϕ)/E_0 in [11]

Figure 3: The comparison of the normalized elastic energy term used in ref. [12] (solid line) and the discrete energy in (5) versus the phase angle ϕ for two different initial shapes at rest: swelling ratio s^*= 0.481 (left) and 0.9 (right).The elastic spring model of the capsule membrane.

shape of the capsule is obtained as the total energy is minimized and such shape is at a stress–free state. Based on the final shape, as the reference shape (and the initial shape for fluid-capsule interaction), the angle between two neighboring springs at the ith node is θ_i^0 for $i = 1, \ldots, N$. Our bending term in equation (5) is similar to the bending energy used by Fedosov *et al.* (e.g., see [20]) which is based on a two–dimensional spring network with the natural state as follows

$$V_{\text{bending}} = k_b \sum_{i=1}^{N_s} [1 - \cos(\theta_i - \theta_0)] = k_b \sum_{i=1}^{N_s} 2 \sin^2(\frac{\theta_i - \theta_0}{2})$$

where N_s is the total number of the springs, θ_i is the angle between two triangles sharing the ith spring as their edges and θ_0 is the angle of uniform natural state. The term E_b defined in equation (5) is a discrete analogue of the elastic energy introduced by Skotheim and Secomb in [11]. The pictures of the normalized E_b and the normalized elastic energy $\sin^2 \phi = 0.5 - 0.5 \cos 2\phi$ used in [11] versus the phase angle ϕ are shown in Fig. 3, in which the graph of the normalized term E_b is obtained by rotating the mass nodes on the membrane of a given fixed shape in a clockwise manner. Both of them have preferred phase angles at zero and 180 degrees. We also modify the bending energy per unit thickness to a weighted sum of both uniform and nonuniform natural states to have a weaker effect of the nonuniform natural state:

$$E_b = \frac{k_b}{2} \left((1 - \alpha) \sum_{i=1}^{N} \tan^2 \left(\frac{\theta_i}{2} \right) + \alpha \sum_{i=1}^{N} \tan^2 \left(\frac{\theta_i - \theta_i^0}{2} \right) \right). \tag{9}$$

Here, α indicates the weight of the nonuniform natural state.

In equations (5), (6) and (9), E_l, E_b, and Γ_s represent energies [N m] per unit thickness of 1 m, and thus the units of k_l, k_b, and k_s are Newton [N]. In this paper, we only consider the capillary number instead of shear rate, because it is the key number to determine the behavior of capsules in two–dimensional flow. The value of the swelling ratio of a capsule is $s^* = s_e/(\pi R_0^2)$. The values of parameters for modeling capsules are as follows: The spring constant is $k_l = 5 \times 10^{-8}$ N, the penalty coefficient is $k_s = 10^{-5}$ N, and the bending constant is $k_b = 5 \times 10^{-10}$ N. Using the above chosen parameter values, the area of the initial shape of the capsule has less than 0.001% difference from the given equilibrium area s_e, and the length of the capsule perimeter of the initial shape has less than 0.005% difference from the circumference of the initial circle.

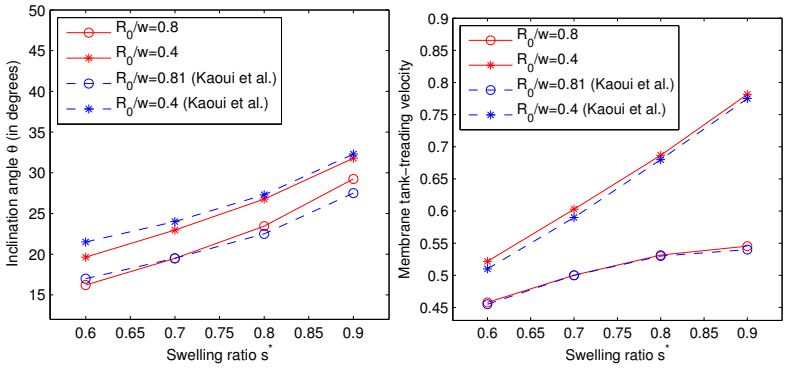

Figure 4: (Color online). Steady inclination angle as a function of the capsule swelling ratio for two degrees of confinement R_0/w= 0.4 and 0.8.

2.2 Computational methods

In simulations, the capsule with the aforementioned initial shape is suspended in a fluid which has a density $\rho = 1.00$ g/cm^3 and a dynamical viscosity $\mu = 0.012$ g/(cm s). The viscosity ratio of the inner and outer fluid of the capsule membrane is fixed at 1.0. The motion of a capsule in fluid flow is simulated by combining the immersed boundary method [24, 25, 26] and the elastic spring model given in equation (9) for the membrane. The Navier–Stokes equations for fluid flow have been solved by using an operator splitting technique and finite element method with a structured triangular mesh so that the specialized fast solver, such as FISHPAK by Adams et al. [35], can be used to solve the fluid flow. The details of computational methodologies are discussed in [34].

3 Validation

3.1 An inextensible capsule tank–treading in the shear flow

First, we present the simulating results of an inextensible capsule with uniform nature state (i.e., $\alpha = 0$ in equation (9) and θ_i^0=0, for $i = 1, \ldots, N$) suspended in a linear shear flow with shear rate $\gamma = 500$/s. The dimensions of the computational domain are $100\mu\text{m} \times 7\mu\text{m}$ and $100\mu\text{m} \times 14\mu\text{m}$. The two degrees of confinement are 0.8 for the narrower domain and 0.4 for the wider domain, respectively. The grid resolution for the computational domain is 80 grid points per 10μm. The time step Δt is 1×10^{-4}ms. The initial velocity of the fluid flow is zero everywhere and the initial positions of the mass center of the capsule are the center of both domains. In both wider and narrower domains, the capsule performs a steady tank–treading motion with a fixed inclination angle which depends on the swelling ratio s^* and degree of confinement. The steady inclination angles and the membrane tank–treading velocities of two different degrees of confinement for five values s^*= 0.6, 0.7, 0.8 and 0.9 are presented in Figure 4, which show good agreement with the results by Kaoui *et al.* [27]. The inclination angle increases monotonically for both two degrees of confinement with increasing the value of the swelling ratio s^*. For the same swelling ratio, the bigger is the degree of confinement, the smaller is the steady inclination angle. On the other side, tank–treading velocity increases almost linearly with respect to increasing of swelling ratio in the narrower channel, while in the wider domain the increasing of tank–treading velocity has slowed down until it arrives almost maximum around $s^* \sim 0.9$. The same qualitative tendency is given in [27]-[32]. We also keep track of the area and the perimeter of the capsule during the simulations. The variation is less than 0.1% in the area and 0.5% in the perimeter. Our model does keep capsules as an inextensible one in simulations.

3.2 A go–and–stop experiment for the shape recovery

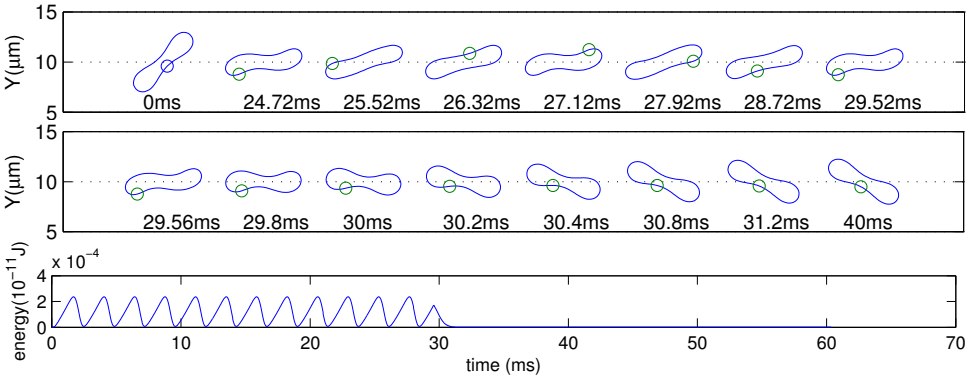

Figure 5: (Color online) A go–and–stop experiment: the snapshots (top and middle) and history of energy (bottom) over the unit thickness of the capsule in shear flow at $C_a = 6.365$. The moving walls are stopped at time 29.52 ms.

A capsule or cell is said to have the shape memory if after stopping the flow, the deformed one will go back to its initial shape with any part of the membrane regaining its original position, i.e., the rim always returns to the rim and the dimple is always back to the dimple. To show that the capsule with a nonuniform natural state modeled by (5)–(7) does have the shape memory property, we have simulated several cases of the go–and–stop.

Figure 5 shows a capsule with $\alpha = 1$ (fully non–uniform) of the swelling ratio $s^* = 0.481$ suspended in a simple shear flow at the capillary number $C_a = 6.365$ in a channel of the length 80μm and width 20μm. The top and bottom walls of the channel are driven at the same speed in opposite directions as shown in Figure 1a. The capsule is at its reference shape at time $t = 0$ s, with a membrane particle at the dimple marked by a small "o". At the beginning, the capsule performs a tank–treading motion with a swinging mode and the marked position tank–treads along the membrane as in Figure 5 (top). We then suddenly stop the motion of two walls by setting the boundary conditions on them equal to zero, and observe (in Figure 5 (middle)) that the capsule first returns to the biconcave shape very quickly and then the marked position tank–treads back to its initial location on the membrane, this behavior is first observed in experiments by T. M. Fischer in [23]. The capsule energy, plotted in Figure 5 (bottom), is minimized when the capsule is at its natural state. During TT with a swinging mode, the capsule energy changes periodically with the period equal to the half of the period of oscillation due to the symmetry of the capsule natural state. After stopping the motion of two walls, the capsule energy returns to the one at its natural state. At lower α values, we get the same behavior of the rim back to the rim and the dimple back to the dimple after the walls stopped moving, as shown in Figure 6 for $\alpha = 0.05$. For $\alpha = 0$ (see Figure 7), the tank–treading motion stops right after the wall motion stops; but the membrane particle from dimple does not go back to the dimple. This suggests that with $0 < \alpha \leq 1$, we can model the behavior of the shape memory. Also with larger α value, we get stronger memory of the reference shape in the sense that membrane tank–treads back to the reference shape faster.

4 Tumbling and tank-treading with a swinging mode

We have considered a capsule with a fully non–uniform natural state ($\alpha = 1$) suspended in shear flow at the capillary numbers $C_a = 0.455$, 9.093, and 90.934 in a channel of the length 80μm and width 20μm. These capillary numbers give rise to two typical motions of the capsule, namely, (i) a tumbling motion and (ii) a tank–treading motion with a swinging mode, respectively. The inclination angle θ and the

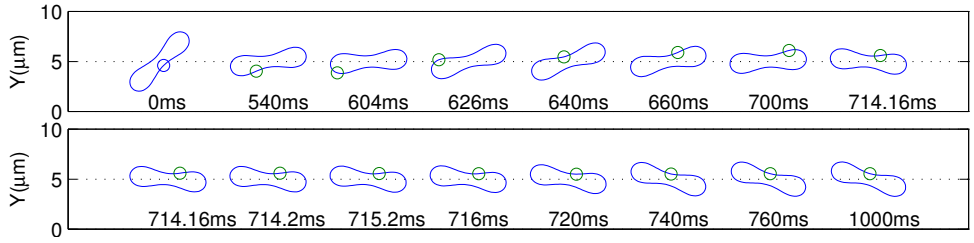

Figure 6: (Color online) Snapshots of the capsule in shear flow with $C_a = 0.182$ in narrower channel for $\alpha = 0.05$. At time $t = 714.16$ ms, the motion of two walls is stopped.



Figure 7: (Color online) Snapshots of the capsule in shear flow with $C_a = 0.091$ in a wide channel for $\alpha = 0$. At time $t = 483.88$ ms, the motion of two walls is stopped.

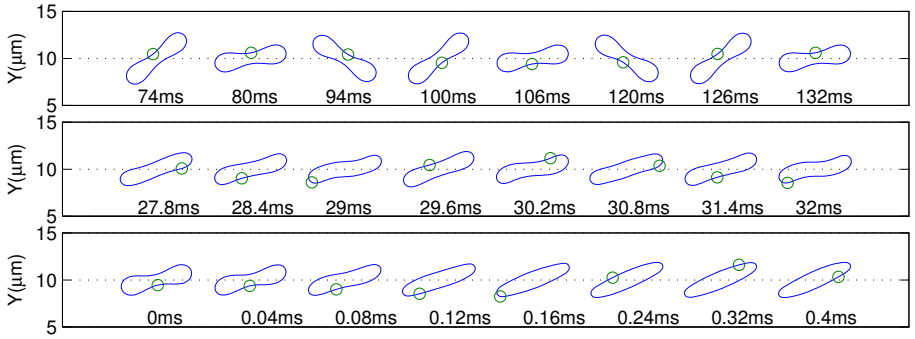

Figure 8: (Color online) Snapshots of the capsule shape and orientation at the capillary number C_a= 0.455 (top), 9.093 (middle), and 90.934 (bottom) illustrate the tumbling (top) and tank–treading with swinging mode (middle and bottom), respectively.

phase angle ϕ defined in Figure 1b and Figure 1c, respectively, are used to described the capsule motion. Since the shape of capsule in shear flow is symmetric about its mass center and so is the reference angles in the bending term E_b, we can restrict the range of both inclination and phase angles to $[-90°, 90°]$. If the inclination angle has the local maxima and minima within $(-90°, 90°)$, the capsule is having a swinging mode; otherwise if the inclination angle decreases monotonously to $-90°$ then jump to $90°$, it has a tumbling motion. The criteria for the phase angle are the opposite. When the local maxima and minima of the phase angle are in $(-90°, 90°)$, the capsule has the tumbling motion. If the phase angle increases monotonously to $90°$ and then jumps to $-90°$, it means that the capsule is tank–treading.

At the capillary number $C_a = 90.934$, the capsule is elongated to an elliptical shape and performs a tank–treading motion with almost the same shape and inclination angle. When reducing the capillary number to 9.093, the capsule tank–treading with periodically oscillating inclination angle is obtained. We also observe that the shape of the capsule is deformed periodically. And at $C_a = 0.455$, the capsule keeps tumbling periodically with a small oscillation of the phase angle. These motions are illustrated by the snapshots and histories of the inclination and phase angles of the capsule in Figures 8 and 9. During the tank–treading with a swinging mode, the capsule keeps changing its shape periodically with respect to the period of tank–treading. The shape deformation comes from the fact that during these motions

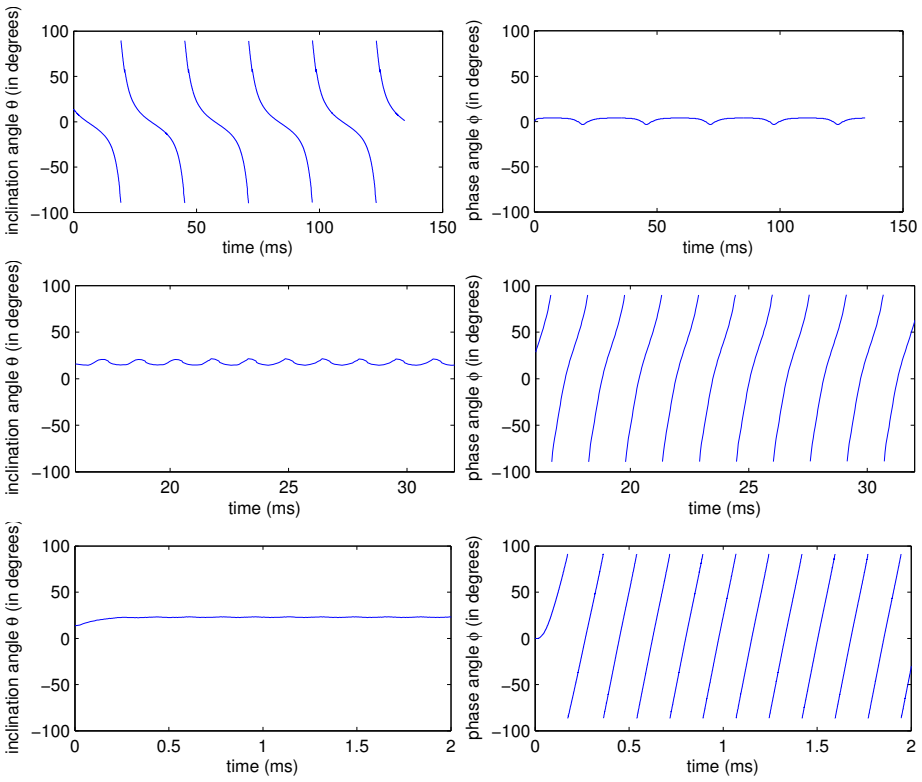

Figure 9: (Color online) Histories of the inclination angle (left) and the phase angle (right) at the capillary number Ca= 0.455 (top), 9.093 (middle), and 90.934 (bottom) associated with the tumbling (top) and tank–treading with swinging mode (middle and bottom), respectively.

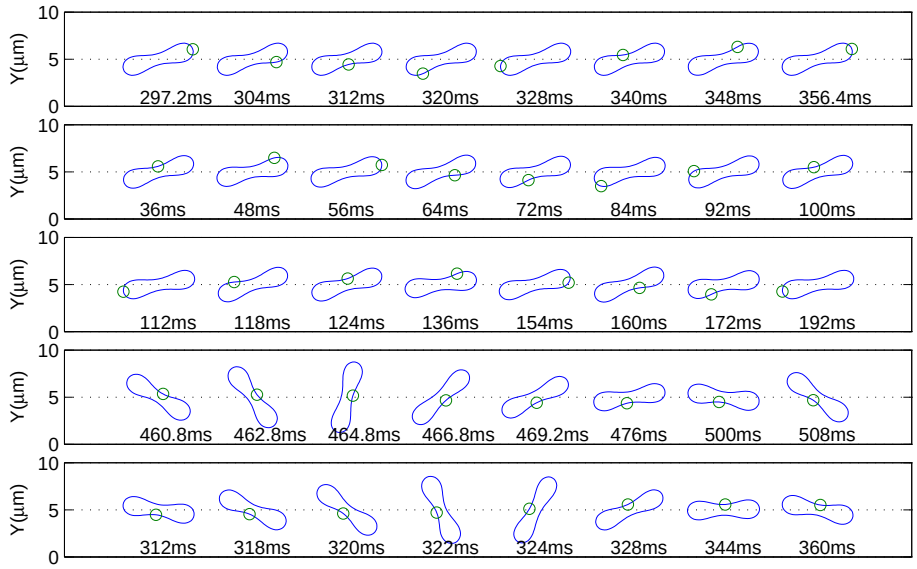

Figure 10: (Color online) Snapshots of the capsule motion of $s^* = 0.481$ with different nonuniform natural states at α=0, 0.05, 0.1, 0.5 and 1, respectively, (from top to bottom) C_a= 0.455.

the membrane tends to reduce the difference between the current bending angle θ_i and the reference angle θ_i^0 to minimize the elastic energy. The obtained swinging mode is always coupled with the tank–

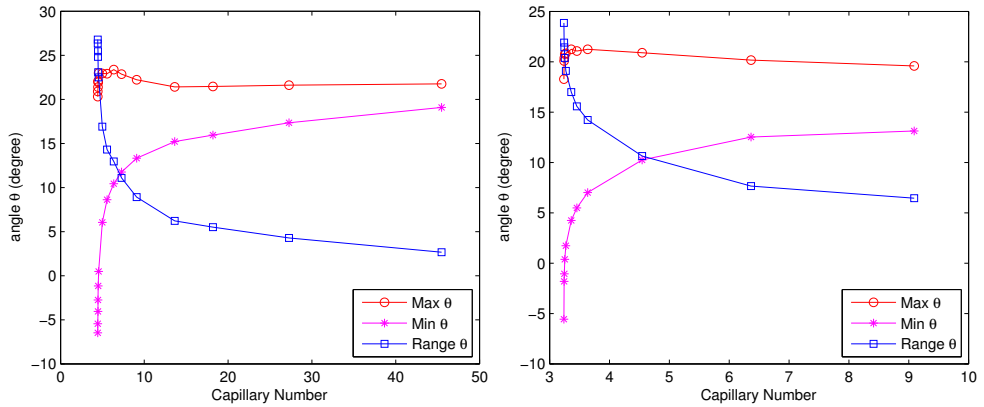

Figure 11: (Color online) Inclination angles in wider channel (left) and narrower channel (right) with respect to capillary numbers.

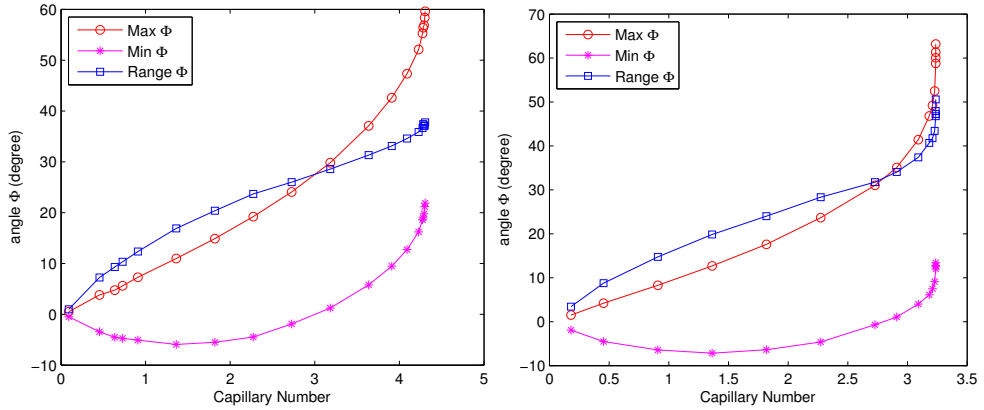

Figure 12: (Color online) Phase angles in wider channel (left) and narrower channel (right) with respect to capillary numbers.

treading motion. At the higher shear rate of $C_a = 90.934$, tank–treading motion is still accompanied by a swinging mode where the oscillation of inclination angle is very small (see Figure 9). To demonstrate that the effect of the bending term E_b given in equations (5) and (9) is also a key factor (besides the viscosity ratio) on the capsule motion in shear flow, we have presented in Figure 10 that the capsule at different nonuniform natural state undergoes either tank–treading motion or tumbling at a shear rate 500 s^{-1}. As the effect of the nonuniform natural state is weaker, the capsule just tank-treads; but under stronger effect, the capsule does tumble as shown in Figure 10. We have also obtained that, for all choices of capillary numbers, the capsule with the uniform natural state undergoes tank–treading motion, which is same as in [21].

The inclination and phase angles in Figures 11 and 12 do behave similarly to those in [11]. While the capsule is in swinging mode, the range of inclination angle decreases as the capillary number is increasing. Also a larger confinement ratio results in the speeding up of the rate of decreasing. On the other hand, while the capsule tumbles, the range of phase angle increases with the increasing of capillary number. but it does not show much dependence on the confinement ratio. The range of phase angle shows that the capsule tank-treads backward and forward while tumbling.

5 The intermittent region between tumbling and tank-treading

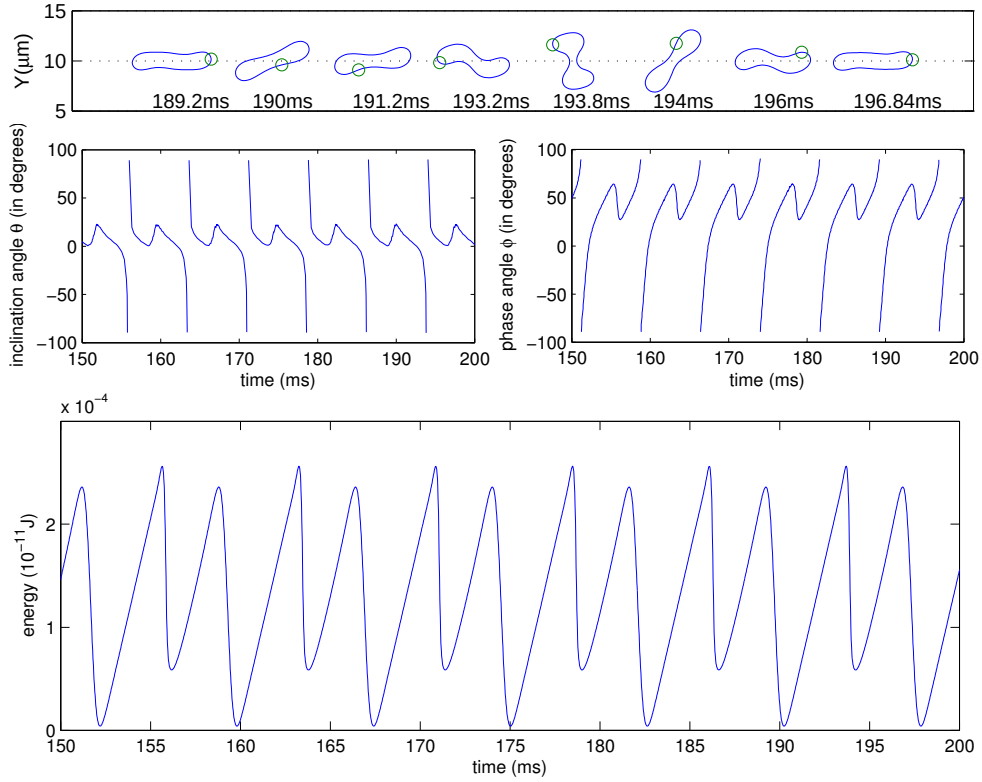

Figure 13: (Color online) Snapshots of the capsule shape and orientation in one cycle (top), histories of the inclination angle (middle left), the phase angle (middle right), and the energy over the unit thickness (bottom) of the capsule at Ca= 4.410.

The intermittent behavior of capsule motion has been obtained in [11] due to the elastic energy term. Our computational results show that the bending energy density E_b in equations (5) and (9) does play a similar role and gives rise to the intermittent behavior of the capsule like those obtained in [11], a mixture of tumbling and TT with a swinging mode. When having the mixture of two motions, we notice that (i) while tumbling, the membrane does tank-tread backward and forward within a small range as presented in Figure 12 and (ii) during tank-treading with a swinging mode, the inclination angle of the capsule only oscillates within a small range as in Figure 11. An example of a mixed dynamics of the capsule in the intermittent region obtained at $C_a = 4.410$ with $\alpha = 1$ is that the capsule performs one tumbling and one TT with a swinging mode in each cycle in a wider channel. Figure 13 shows the snapshots of the capsule motion in one cycle as well as the histories of the inclination angle, the phase angle and the capsule energy. Since the capsule performs one tumbling and one TT with a swinging mode in each cycle, both angles show jumps (see the middle two of Figure 13). From the snapshots of the capsule motion (the top one of Figure 13), the marker "$\circ$" on the membrane moves in the clockwise direction at the first 4 different times while oscillating, then moves backward and forward, while tumbling, as shown at $t = 193.8$ ms 194 ms, and 196 ms, and finally finishes one complete tank-treading at $t = 196.84$ ms. Such motion shows a mixed dynamics of tumbling and one TT with a swinging mode in each cycle. The energy required for the tumbling in each cycle appears to be higher than that during the TT with a swinging mode, because when the capsule oscillates, it has an elongated shape which is much closer to the original biconcave shape than those shapes when the capsule tumbles. Another typical example of the mixed dynamics of the capsule with $\alpha = 1$ at $C_a = 4.4319$ in the intermittent region is shown in

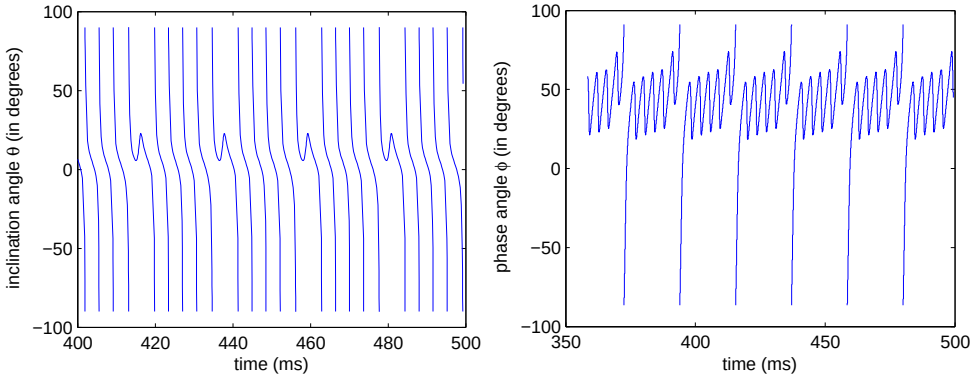

Figure 14: (Color online) Histories of the inclination angle (left) and the phase angle (right) of the capsule at Ca= 4.319

Figure 14. We have observed that the capsule has five tumbling and one TT with a swinging mode in each cycle (i.e., a periodic pattern of the mixed dynamics). In Figure 14, the membrane moves backward and forward slightly during each tumbling; it finally moves across the hurdle and finishes a period of a tank-treading.

Here are the details of the intermittent region for the case $\alpha = 1$. Since the capsule has a relatively strong memory of its shape as $\alpha = 1$, such region is larger than those with weaker non-uniform natural state. Actually, according to our simulations, the value of α only effects the critical Capillary number and the range of the Capillary number where intermittent behavior occurs. As shown in Figure 15a, the capsule performs tumbling motion in a wider channel for the capillary number C_a less than a critical value of 4.274 and TT with a swinging mode for C_a greater than 4.456. The intermittent region is at $4.274 < C_a < 4.456$. The embedded sub–figure in Figure 15a corresponds to the contrast ratio between the number of the tumbling and the number of the periods of tank–treading with a swinging mode in one cycle of the capsule motion at the intermittent region. When the capillary number is very close to and below the threshold for the transition to the pure TT with a swinging mode, the capsule tumbles once after several periods of TT with a swinging mode in one cycle. The number of periods of TT with a swinging mode in each cycle decreases with respect to the decreasing of the capillary number, until the capsule tumbles once and has one period of TT with a swinging mode alternatively. This should be a relatively stable dynamics in the intermittent region since we observed it happens over a range of the capillary number. Then the capsule performs more tumbling between two consecutive periods of TT with a swinging mode when we keep reducing the capillary number, finally when the capillary number is less than the threshold for the intermittent region, the capsule just tumbles. In a narrower channel of dimensions 80μm $\times 10\mu$m, the capsule enters the intermittent region at a critical capillary number 3.237, and performs pure TT with a swinging mode for the capillary number $C_a > 3.242$, which gives a smaller range of the capillary number for the intermittent region (see Figure 15b). The embedded sub–figure in Figure 15b also show the capsule behaves similarly at the intermittent region in a narrower channel.

An interesting observation is that the periods of tumbling and TT with a swinging mode have a sharp raise when the capsule motion is close to the thresholds as in Figure 15c. For the capillary number right above the intermittent region, one of the explanations is that while the capsule changes its shape, the membrane particle leaves its natural–state position during the tank-treading motion. But the force caused by the bending energy is tending to pull the membrane back to its original natural state, which obviously is against the viscous force of flow which would like to push the membrane particles moving along the membrane. Hence when the capillary number is just right above the intermittent region, the tank–treading motion is slower since the contrast between these two forces is not significant when

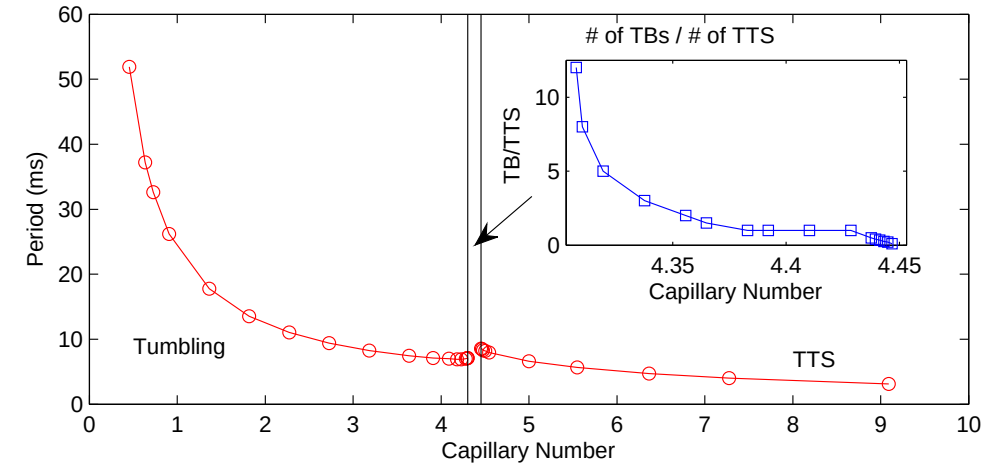

(a)

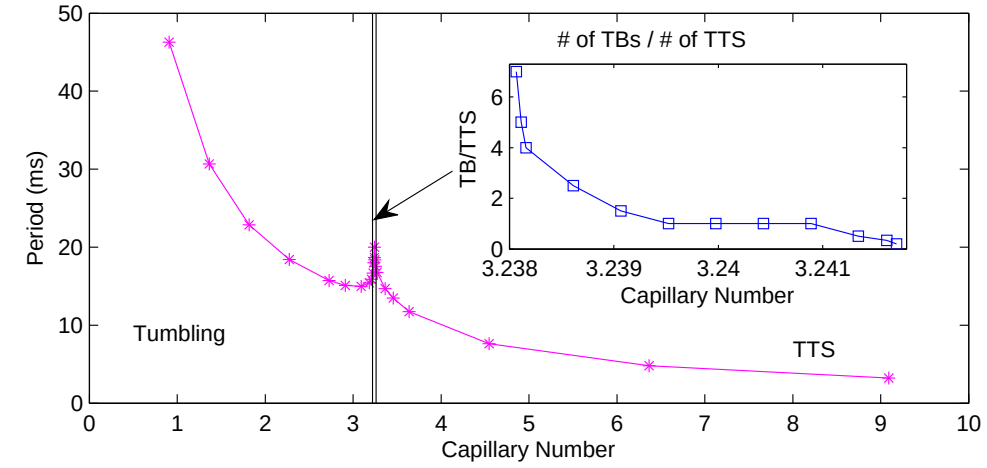

(b)

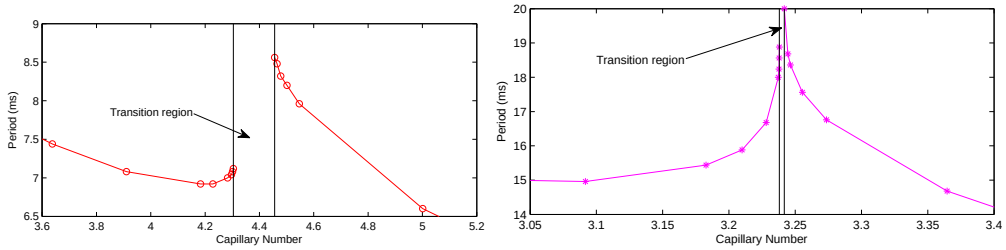

(c)

Figure 15: (Color online) Histories of period of tumbling and tank-treading with a swinging mode of the capsule of $s^* = 0.481$ in (a) a wider channel, (b) a narrower channel and (c) the enlargement of the intermittent region of Fig. (a) (left) and Fig. (b) (right).

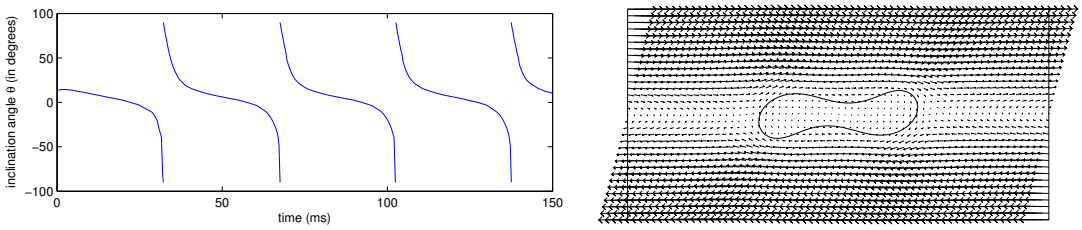

Figure 16: (Color online) History of the inclination angle (left) and a velocity filed snapshot (right) of the capsule in a wider channel at Ca= 4.274.

comparing with those of higher capillary number. For the capillary number right below the intermittent region, the capsule just tumbles and has a shape of long body. In the non-Stokes flow regime, a neutrally buoyant rigid particle of elliptic shape in shear flow has a transition from the tumbling motion to the state with a fixed inclination angle (i.e., no rotation at all). As the shear rate increases, the circulation before and after the long body becomes stronger and then the long body can be held by the fluid flow with a fixed inclination angle (see, e.g., [38, 39]). In this paper, the capsule of a long body shape suspended in shear flow is actually a neutrally buoyant entity. Similarly the capsule slows down its tumbling rotation when the capillary number is less than and closer to the threshold for the transition to the intermittent region. Figure 16 shows the circulation of the velocity field before and after the capsule and the history of the inclination angle of the capsule in a wider channel at Ca= 4.274 in which the tumbling rotation of the capsule slows down at the inclination angle around 5° degrees. Thus the period of tumbling increases as the capillary number increases since the strength of the flow field circulation before and after the capsule is increased.

For the effect of the swelling ratio, we have tested the values of $s^* = 0.6$, 0.7, 0.8 and 0.9 and obtained that for the capsule of swelling ratio greater than 0.6, it is almost impossible to capture the intermittent region computationally since the size of the range of the capillary number for such region is about zero if it exists. In Figure 17, results similar to those in Figure 15 are shown for the case of the capsule of the swelling ratio $s^* = 0.9$, whose shape is about an elliptical shape. The capsule of the swelling ratio s^* can be characterized by its excess circumference $\triangle c = 2\pi(\frac{1}{\sqrt{s^*}} - 1)$. For the biconcave shape of $s^* = 0.481$, its $\triangle c$ is 2.77638; but the one for an elliptical shape of $s^* = 0.9$ is 0.33987. The excess circumference $\triangle c$ is similar to the excess area used in [13]. For the small values of $\triangle c$, we do not expect to obtain the intermittent region. Our result is consistent with the results obtained by Tsubota *et al.* in [21] since the cells used in their simulations have the swelling ratio of 0.7.

5.1 The effect of the nonuniform natural state

As mentioned in the previous subsection, with lower values of α, a capsule does not tend to change shape as much as capsule with $\alpha = 1$. Even in the intermittent region, the capsule prefers keeping the biconcave shape (see Figure 18 for an example), which is unlike the one shown in Figure 13 for $\alpha = 1$. Figure 19 shows that the critical value of the capillary number for the transition from tumbling to the intermittent region is proportional to the value of α, this can be explained by defining a weighted bending capillary number with respect to α: $\mathrm{Ca}_B^\alpha = \mu R_0^3 \dot{\gamma}/(\alpha k_B l_0)$ which is similar to the bending capillary number defined by Tsubota et al. in [21]. This number represents the relative effect of fluid viscous force versus surface tension which comes from the memory of the reference angles $\{\theta_i^0\}$, and therefore a scale of α should be added. The capsule has tumbling motion when the viscous force from outer fluid is less than the force pulling it back to initial position, and TT with a swinging mode when the viscous force is larger. Intermittent behavior occurs when $\mathrm{Ca}_B^\alpha \sim k$, where k depends on swelling

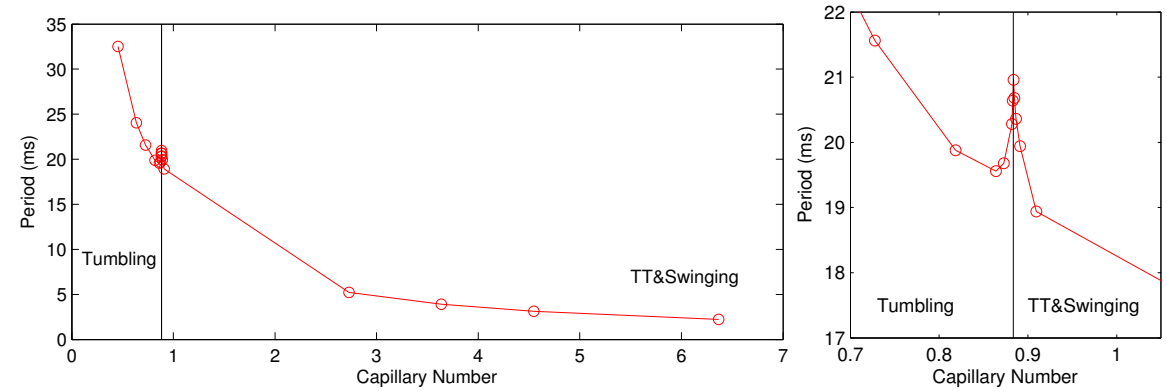

(a)

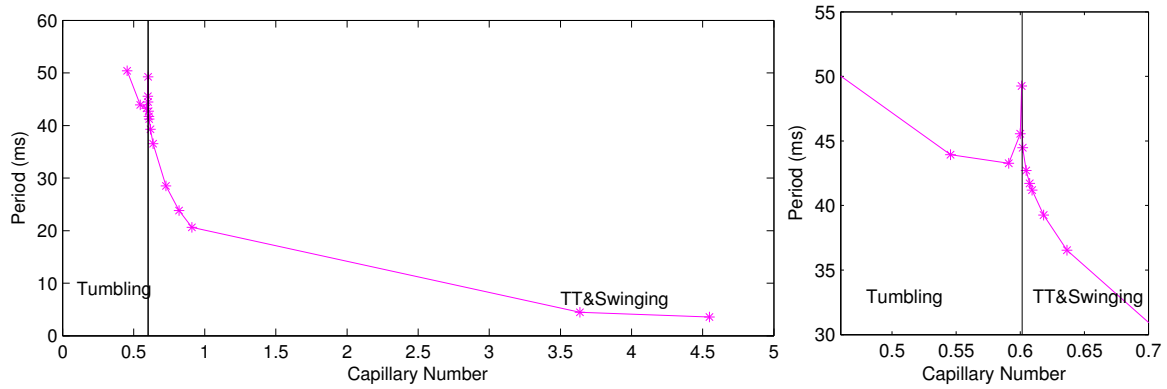

(b)

Figure 17: (Color online) Histories of period of tumbling and tank–treading of the capsule of $s^* = 0.9$ (left) and the enlargement of the intermittent region (right) in (a) a wider channel and (b) a narrower channel.

ratio and degree of confinement, etc. This implies that $\dot{\gamma} \sim \alpha k_B l_0/(\mu R_0^3)$, i.e. the capillary number of the intermittency is proportional to the value of α (because the capillary number is proportional to the shear rate). The size of the capillary number range for the intermittent region is increasing as α increases. When α is small, the rate of increasing is almost linear. But as α raising up, this rate slows down as the capsule becomes more deformable and can change shape accordingly to achieve periodic tumbling or TT with a swinging mode, which is more preferred because the energy change is more stable than in intermittent states.

The mixed dynamical behavior of the capsule in the intermittent region with respect to Ca_B^α is plotted in Figure 20, where the y-axis interprets the number of tank–treading with a swinging mode over the number of tumbling in each cycle, and x-axis is the difference between $1/Ca_B^\alpha$ and its value at the boundary of pure tank–treading regime and intermittency. In the "more tank–treading than tumbling per cycle" regime, the tendency is almost linear with the slope of -0.45 until slope becomes a little sharper when close to the "one tank–treading and one tumbling alternatively" regime, which is consistent with the results obtained by Skotheim and Secomb in [11].

One major observation through Figure 20 is that the "one tumbling and one tank–treading alternatively" regime is not eliminated when reducing the effect of nonuniform natural state, even with α values as small as 0.05, where the capsule is only little deformable, this suggests this is a relative stable state in the intermittent region.

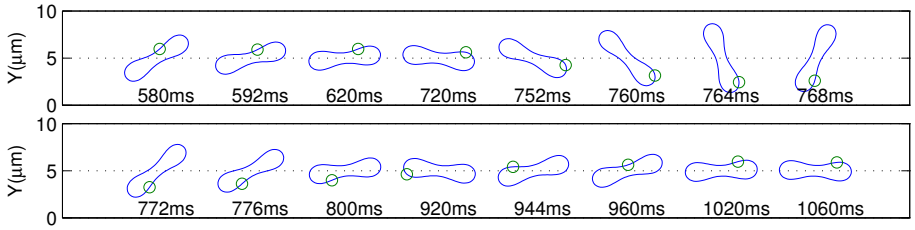

Figure 18: (Color online) Snapshots of a tank–treading motion of a capsule with $\alpha = 0.05$ at the intermittent region in shear flow at $C_a = 0.163$.

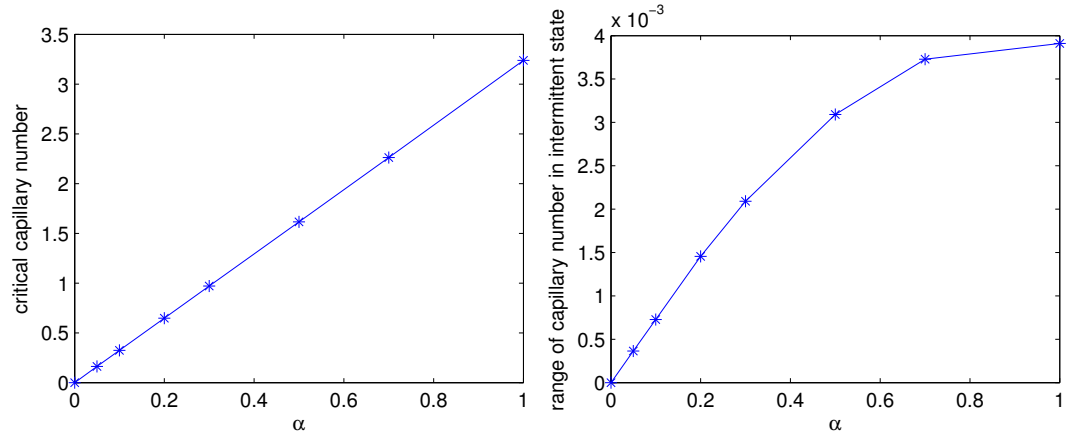

Figure 19: (Color online) The intermittent region versus the shape memory coefficient α: the plot of the critical value of the capillary number for the transition from tumbling to the intermittent region (left) and the size of the capillary number range for the intermittent region (right).

6 Conclusions

In this paper, we have analyzed the dynamics of an inextensible capsule suspended in two–dimensional shear flow under the effect of the nonuniform natural state. Besides the viscosity ratio of the internal fluid and external fluid of the capsule, the nature state effect also plays a role for having the transition between two well known motions, tumbling and tank-treading with the long axis oscillating about a fixed inclination angle, when varying the shear rate. The intermittent region between tumbling and TT with a swinging mode of the capsule with a biconcave rest shape has been obtained in a narrow range of the capillary number. In such region, the dynamics of the capsule is a mixture of tumbling and TT with a swinging mode and when having the tumbling motion, the membrane tank-tread backward and forward within a small range. As the capillary number is very close to and below the threshold for the pure TT with a swinging mode, the capsule tumbles once after several TT periods in each cycle. The number of TT periods in one cycle decreases with respect to the decreasing of the capillary number, until the capsule has one tumble and one TT period alternatively and such alternating motion exists over a range of the capillary number; and then the capsule performs more tumbling between two consecutive TT periods when reducing the capillary number further, and finally shows pure tumbling. Surprisingly the "one tumbling and one tank–treading alternatively" mode is very persistent.

The critical value of the swelling ratio for having the intermittent behavior has been estimated. For those greater than 0.6 ($\triangle c$=1.82837), it is almost impossible to capture the intermittent behavior computationally since the size of the range of the capillary number for such behavior is about zero if it exists. For the small values of $\triangle c$ (associated with large swelling ratio s^*), we do not expect to obtain

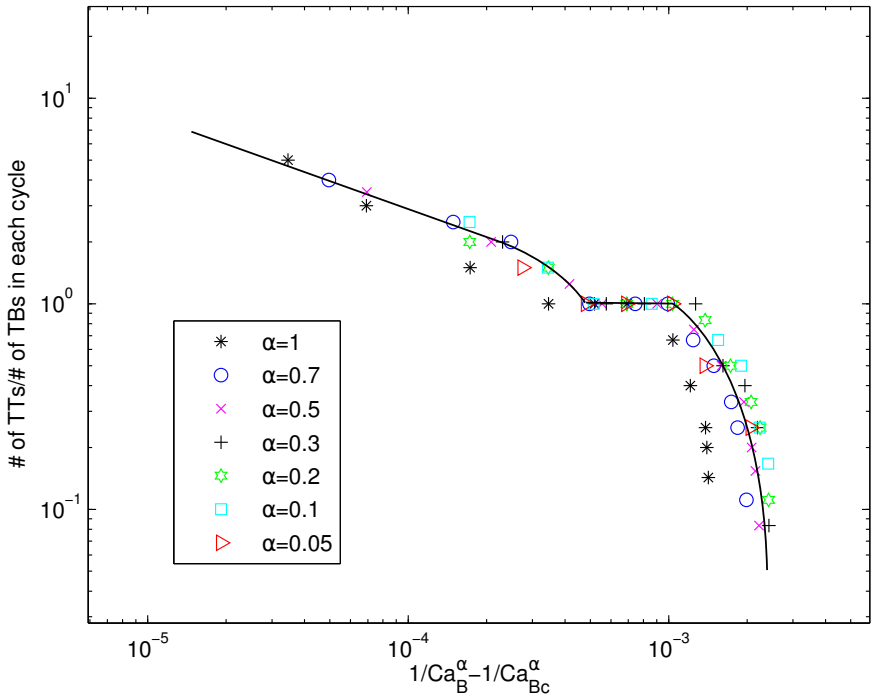

Figure 20: (Color online) The mixed dynamical behavior of the capsule with effect of shape memory α varies from 0.05 to 1, in a narrower channel.

the intermittent region.

An interesting observation is that the period has a sharp raise when the capsule motion is close to the intermittent region. For the capillary number right above the intermittent region, the force caused by the bending energy is tending to pull the membrane back to its original natural state, which obviously is against the viscous force of flow which would like to push the membrane particles moving along the membrane. Hence when the capillary number is right above the intermittent region, the tank–treading motion is slower since the contrast between these two forces is not significant. For the capillary number right below the intermittent region, the capsule is a neutrally buoyant entity and slows down its tumbling rotation when the capillary number is less than and closer to the threshold for the intermittent region, which is closely related to the case of a neutrally buoyant rigid particle in shear flow.

Another observation is that in the intermittent region, the change of contrast between numbers of tumbling and tank–treading is not linear, especially when the weighted bending capillary number is close to or in the range of a relatively stable "one tumbling and one tank–treading per cycle" mode, we discussed this phenomenon may result from the deformability of capsule, even with the value of α as small as 0.05, the capsule may still have some invisible shape changes and is able to perform one tumbling one tank–treading in each cycle within a range of weighted bending capillary number.

Acknowledgments

This work is supported by an NSF grant DMS–0914788. We acknowledge the helpful comments of James Feng, Ming-Chih Lai and Sheldon X. Wang.

References

[1] K. H. de Haas, C. Blom, D. van den Ende, M. H. G. Duits, and J. Mellema, *Phys. Rev. E* **56**, 7132 (1997).

[2] V. Kantsler and V. Steinberg, *Phys. Rev. Lett.* **96**, 036001 (2006); 95, 258101 (2005).

[3] U. Seifert, *Eur. Phys. J. B* **8**, 405 (1999).

[4] C. Misbah, *Phys. Rev. Lett.* **96**, 028104 (2006).

[5] M. Kraus, W. Wintz, U. Seifert, and R. Lipowsky, *Phys. Rev. Lett.* **77**, 3685 (1996).

[6] J. Beaucourt, F. Rioual, T. Seń, T. Biben, and C. Misbah, *Phys. Rev. E* **69**, 011906 (2004).

[7] H. Noguchi and G. Gompper, *Phys. Rev. Lett.* **93**, 258102 (2004).

[8] H. Noguchi and G. Gompper, *Phys. Rev. E* **72**, 011901 (2005).

[9] H. Noguchi and G. Gompper, *Phys. Rev. Lett.* **98**, 128103 (2007).

[10] S. R. Keller and R. Skalak, *J. Fluid Mech.* **120**, 27 (1982).

[11] J.M. Skotheim and T.W. Secomb, *Phys. Rev. Lett.* **98**, 078301 (2007).

[12] S. Kessler, R. Finken, and U. Seifert, *J. Fluid Mech.* **605**, 207(2008).

[13] P. M. Vlahovska, T.-N. Young , G. Danker and C. Misbah, *J. Fluid Mech.* **678**, 221 (2011).

[14] C. Dupont, A.-V. Salsac, and D. Barthés-Biesel, *J. Fluid Mech.* **721**, 180 (2013).

[15] T. M. Fischer, M. Stöhr-Liesen, and H. Schmid-Schönbein, *Science* **202**, 894 (1978).

[16] R. Tran-Son-Tay, S. P. Sutera, and P. R. Rao, *Biophys. J.* **46**, 65 (1984).

[17] C. Pozrikidis, *Ann. Biomed. Eng.* **31**, 1194 (2003).

[18] M. Abkarian, M. Faivre and A. Viallat, *Phys. Rev. Lett.* **98**, 188302 (2007).

[19] Y. Sui, Y. T. Chew, P. Roy, Y. P. Cheng, and H. T. Low, *Phys. Fluids* **20**, 112106 (2008)

[20] D.A. Fedosov, B. Caswell, and G. E. Karniadakis, *Biophys J.* **98**, 2215 (2010).

[21] K. Tsubota and S. Wada, *Phys. Rev. E* **81**, 011910 (2010).

[22] K. Tsubota, S. Wada, and H. Liu, *Biomech Model Mechanobiol* (available online), DOI 10.1007/s10237-013-0530-z.

[23] T. M. Fischer, *Biophys. J*, **86**, 3304 (2004).

[24] C. S. Peskin, *J. Comput. Phys.* **25**, 220 (1977).

[25] C. S. Peskin and D. M. McQueen, *J. Comput. Phys.* **37**, 11332 (1980).

[26] C. S. Peskin, *Acta Numer.* **11**, 479 (2002).

[27] B. Kaoui, J. Harting, and C. Misbah, *Phys. Rev. E*, **83**, 066319 (2011).

[28] T. M. Fischer, M. Stöhr-Liesen, and H. Schmid-Schönbein, *Science*, **202**, 894 (1978).

[29] S. R. Keller, and R. Skalak, *J. Fluid Mech.*, **120**, 27 (1982).

[30] H. B. Li, H. H. Yi, X. M. Shan, and H. P. Fang, *Europhysics Letters*, **81**, 54002 (2008).

[31] T. W. Pan, and T. Wang, *International Journal of Numerical Analysis and Modeling*, **6**, 455 (2009).

[32] J. Beaucourt, F. Rioual, T. Séon, T. Biben, and C. Misbah, *Phys. Rev. E*, **9**, 011906 (2004).

[33] T.-W. Pan, L. Shi, R. Glowinski, Chinese Annals of Mathematics, Series B 31 (2010) 975-990.

[34] L. Shi, T.-W. Pan, and R. Glowinski, *Int. J. Numer. Methods Fluids* **68**, 1393 (2012).

[35] J. Adams, P. Swarztrauber and R. Sweet, FISHPAK: A package of Fortran subprograms for the solution of separable elliptic partial differential equations, The National Center for Atmospheric Research, Boulder, CO, 1980.

[36] L. Shi, T.-W. Pan, R. Glowinski, *Phys. Rev. E* **85**, 016307 (2012).

[37] L. Shi, T.-W. Pan, R. Glowinski, *Phys. Rev. E* **86**, 056308 (2012)..

[38] E. Ding, C.K. Aidun, *J. Fluid Mech* **423**. 317 (2000).

[39] S.-D. Chen, T.-W. Pan, C.-C. Chang, *Phys. Fluids* **24**, 103302 (2012).

[40] G. Segre, A. Silberberg, *Nature (London)* **189**, 209 (1961).

[41] G. Segre, A. Silberberg, *J. Fluid Mech.* **14**, 136 (1962).